


# NEW PRODUCT INFORMATION

## Portable Surface Roughness Tester Surftest SJ-210

The new Surftest® SJ-210 portable surface roughness tester combines high accuracy and measurement speed with numerous innovative features creating a new class leader in surface inspection.



- 2.4" color LCD display includes backlighting and over-size fonts
- Display direction can be changed to be read vertically or horizontally right and left-handed
- Color tolerance judgments, evaluation curves and all data can be displayed in one of 16 languages
- Self-timed measurement supported
- Security management supports password protected function locks

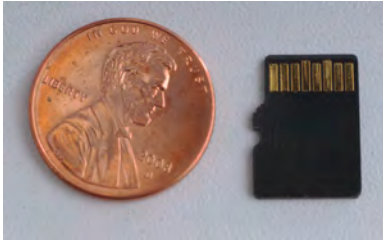


- A micro-SD card supports high-volume portable data storage - up to 10,000 results can be stored
- Screen capture to memory card also supported



- Optional footswitch can be used for touch-free measurement
- Multiple output options include RS-232C and USB for maximum versatility

## Main specifications

<b>Model No.</b>		<b>SJ-210</b>
		<b>4mN type</b>
<b>Order No.</b>		<b>178-561-02A</b>
Measuring range	X-axis	.5 inch (17.5mm *includes pre/post travel)
	Z-axis	14200µin (-7900 µin~+6300 µin) [360 µm (-200 µm~+160 µm)]
Tracing speed	Measuring	.01, .02, .03 in/s (0.25, 0.5, 0.75 mm/s)
	Returning	.04 in/s (1 mm/s)
Detector	Stylus tip radius	200 µin (5 µm)
	Minimum range/resolution	1000 µin / .08 µin (25 µm / 0.002 µm)
	Measured profile	Primary profile (P), Roughness profile (R), DF profile, R-Motif
Display unit	Evaluation parameters	Ra, Rq, Rz, Ry, Rv, Rt, R3z, Rsk, Rku, Rc, RPC, RSm, Rmax*1 Rz1max, S, HSC, RzJIS*2, Rppi, RΔa, RΔq, Rlr, Rmr, Rmr(c), Rc, Rk, Rvk, Mr1, Mr2, A1, A2, Vo, Rpm, tp, Htp, R, Rx, AR
	GO/NG judgement	Max. value, / 16% / standard deviation
	Sample length	.003, .01, .03, .1in (0.08, 0.25, 0.8, 2.5 mm)
	Number of sampling lengths	x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, arbitrary length
	Digital filter	2CR75 / PC75 / Gaussian
	Display languages	16 languages
	Auto-sleep off function	10-600 sec (Auto-sleep not valid when AC adaptor is used.)
	Input / Output	USB, SPC, Printer output, RS-232C, Foot switch, MicroSD
	LCD specifications	2.4" color TFT with back light (320 x 240 pixels)
	Standards	JIS'82, JIS'94, JIS'01, ISO, ANSI, VDA
	Measurement result display	Vertical, horizontal (invertible), curve, graph, value
	Built-in battery (Ni-MH)	4hrs. for full charge (approx. 1000 measurements)

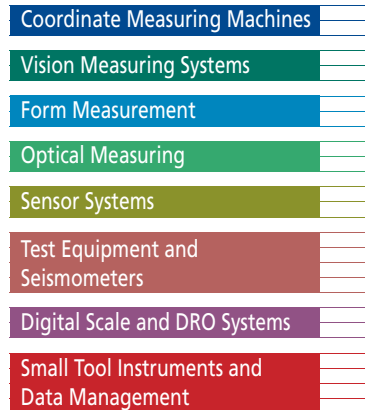

**Note:** All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority.

### Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

We reserve the right to change specifications and prices without notice.

**Mitutoyo America Corporation**  
 www.mitutoyo.com  
 One Number to Serve You Better  
**1-888-MITUTOYO (1-888-648-8869)**

**Mitutoyo**  
 Precision is our Profession